



HD 3406.2 BENCH-TOP CONDUCTIVITY METER

The **HD3406.2** is a bench top instrument for electrochemical measures: **conductivity and temperature**.

The displayed data can be stored (**datalogger**) and can be transferred to PC or serial printer thanks to the multi-standard serial port RS232C and USB2.0 and software DeltaLog9 (Vers.2.0 and subsequent ones). The storing and printing parameters can be set from menu.

The **HD3406.2** measures **conductivity, resistivity in liquids, total dissolved solids (TDS) and salinity** using combined 4-ring and 2-ring conductivity/temperature probes. Temperature is measured by Pt100 or Pt1000 immersion, penetration or contact probes.

The probe calibration can be performed automatically in one or more of the 147µS, 1413µS, 12880µS or 111800µS/cm conductivity calibration solutions.

The display shows continually the temperature in °C or °F and one selectable parameter according to the connected probe type, i.e. in case of conductivity probe it is possible to select between χ or Ω or TDS or NaCl.

Other functions of this instrument include: Max, Min and Avg function, the Auto-HOLD function, the automatic turning off which can also be excluded.

The instruments have IP66 protection degree.



Instrument
Dimensions (Length x Width x Height) 220x120x55mm
Weight 460g (complete with batteries)
Materials ABS, rubber
Display 2x4½ characters plus symbols
visible area: 52x42mm

Operating conditions
Working temperature -5 ... 50°C
Storage temperature -25 ... 65°C
Working relative humidity 0 ... 90% RH without condensation
Protection degree IP66

Power
Batteries 3 batteries 1.5V type AA
Autonomy (only batteries) 100 hours with 1800mAh alkaline batteries
Mains (cod. **SWD10**) Output mains adapter 100-240Vac/ 12Vdc-1A

Security of memorized data Unlimited

Storage of measured values
Type 2000 pages of 18 samples each
Quantity 36,000 sets of measures made up of [χ - Ω or TDS or NaCl] and [°C- °F]

Selectable storage interval 1s, 5s, 10s, 15s, 30s, 1min, 2min, 5min, 10min, 15min, 20min, 30min and 1hour

Time
Date and hour Schedule in real time
Accuracy 1min/month max drift


Serial interface RS232C
Type RS232C electrically isolated
Baud rate Can be set from 1200 to 38400 baud
Data bit 8
Parity None
Stop bit 1
Flow Control Xon/Xoff
Serial cable length Max 15m
Selectable print interval immediate or 1s, 5s, 10s, 15s, 30s, 1min, 2min, 5min, 10min, 15min, 20min, 30min and 1hour

USB Interface
Type 1.1 - 2.0 electrically isolated

Common connections to all models
Serial interface and USB 8-pole MiniDin connector
Mains adapter (cod. SWD10) 2-pole connector (positive at centre) 12Vdc/1A

Measurement connections
Input conductivity 8-pole male DIN45326 connector
Input for temperature probes 8-pole male DIN45326 connector
complete with TP47 modules

Measurement of conductivity by instrument	Resolution	
Measurement range (Kcell=0.01)	0.000...1.999µS/cm	0.001µS/cm
Measurement range (Kcell=0.1)	0.00...19.99µS/cm	0.01µS/cm
Measurement range (Kcell=1)	0.0...199.9µS/cm	0.1µS/cm
	200...1999µS/cm	1µS/cm
	2.00...19.99mS/cm	0.01mS/cm
	20.0...199.9mS/cm	0.1mS/cm
Measurement range (Kcell=10).	200...1999mS/cm	1mS/cm
Accuracy (conductivity)	±0.5% ±1 digit	

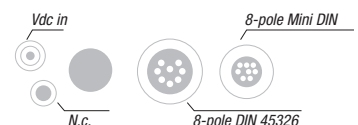

Measurement of resistivity by instrument

Measurement range (Kcell=0.01)	Up to 16Ω·cm
Measurement range (Kcell=0.1)	Up to 100MΩ·cm
Measurement range (Kcell=1)	5.0...199.9Ω·cm 200...999Ω·cm 1.00k...19.99kΩ·cm 20.0k...99.9kΩ·cm 100k...999kΩ·cm 1...10MΩ·cm
Measurement range (Kcell=10)	0.5...5.0Ω·cm
Accuracy (resistivity)	±0.5% ±1 digit

Measurement of total dissolved solids (with coefficient χ /TDS=0.5)

Measurement range (Kcell=0.01)	0.00...1.999mg/l	0.005mg/l
Measurement range (Kcell=0.1)	0.00...19.99mg/l	0.05mg/l
Measurement range (Kcell=1)	0.0...199.9 mg/l 200...1999 mg/l 2.00...19.99 g/l 20.0...99.9 g/l	0.5 mg/l 1 mg/l 0.01 g/l 0.1 g/l
Measurement range (Kcell=10)	100...999 g/l	1 g/l
Accuracy (total dissolved solids)	±0.5% ±1 digit	

Measurement of salinity

Measurement range	0.000...1.999g/l 2.00...19.99g/l 20.0...199.9g/l	1mg/l 10mg/l 0.1g/l
Accuracy (salinity)	±0.5% ±1 digit	

Temperature measurement by instrument

Measurement range Pt100	-50...+200°C
Measurement range Pt1000	-50...+200°C
Resolution	0.1°C
Accuracy	±0.25°C
Drift after 1 year	0.1°C/year

Automatic/manual temperature compensation

Reference temperature	0...100°C with $\alpha_T = 0.00...4.00\%/^{\circ}\text{C}$
Conversion factor χ /TDS	20°C or 25°C selectable from menu
Cell constant K (cm ⁻¹)	0.4...0.8
	0.01 - 0.1 - 0.7 - 1.0 - 10.0

Standard solutions automatically detected (@25°C)

147µS/cm
1413µS/cm
12880µS/cm
111800µS/cm

(*) The resistivity measurement is obtained from the reciprocal of conductivity measurement. Close to the bottom of the scale, the indication of resistivity appears like reported in the table below:

K cell = 0.01 cm ⁻¹		K cell = 0.1 cm ⁻¹	
Conductivity (µS/cm)	Resistivity (MΩ·cm)	Conductivity (µS/cm)	Resistivity (MΩ·cm)
0.001 µS/cm	1000 MΩ·cm	0.01 µS/cm	100 MΩ·cm
0.002 µS/cm	500 MΩ·cm	0.02 µS/cm	50 MΩ·cm
0.003 µS/cm	333 MΩ·cm	0.03 µS/cm	33 MΩ·cm
0.004 µS/cm	250 MΩ·cm	0.04 µS/cm	25 MΩ·cm

ORDERING CODES

HD3406.2: The kit is composed of: instrument HD3406.2 **datalogger**, for measurement of conductivity - resistivity - TDS - salinity - temperature, 3 1.5V alkaline batteries, operating manual and **DeltaLog9 version 2.0**.

Conductivity probes, temperature probes, standard reference solutions, cables for data download to PC or printer have to be ordered separately.

Accessories

HD2110CSNM: 8-pole connection cable Mini Din - Sub D 9-pole female for RS232C, for connection to PC without USB input.

HD2101/USB: Connection cable USB 2.0 connector type A - 8-pole Mini Din for connection to PC with USB input.

SWD10: Stabilized power supply at 100-240Vac/12Vdc-1A mains voltage.

HD40.1: Portable, serial input, 24 column thermal printer, 57mm paper width.

HD22.2: Laboratory electrode holder composed of basis plate with incorporated magnetic stirrer, staff and replaceable electrode holder. Height max. 380mm.

HD22.3: Laboratory electrode holder with metal basis plate. Flexible electrode holder for free positioning. For Ø 12mm probes.

TP47: Connector for Pt100 4-wire and Pt1000 2-wire probes without SICRAM module.

Resolution

(*)	0.1Ω·cm
(*)	1Ω·cm
	0.01kΩ·cm
	0.1kΩ·cm
	1kΩ·cm
	1MΩ·cm
	0.1Ω·cm

Combined conductivity and temperature probes

SP06T: Combined conductivity and temperature 4-electrode cell in Platinum, body in Pocan. Cell constant K = 0.7. Measurement range 5µS/cm...200mS/cm, 0...90°C. Max. working pressure 5bar.

SPT401.001: Combined conductivity and temperature 2- electrode cell in stainless steel AISI 316. Cell constant K = 0.01. Measurement range 0.04µS/cm...20µS/cm, 0...120°C. **Measurement in closed-cell.** Max. working pressure 5bar.

SPT01G: Combined conductivity and temperature 2-electrode Platinum-wire cell, body in glass. Cell constant K = 0.1. Measurement range 0.1µS/cm...500µS/cm, 0...80°C. Max. working pressure 5bar.

SPT1G: Combined conductivity and temperature 2-electrode Platinum-wire cell, body in glass. Cell constant K = 1. Measurement range 10µS/cm...10mS/cm, 0...80°C. Max. working pressure 5bar.

SPT10G: Combined conductivity and temperature 2-electrode Platinum-wire cell, body in glass. Cell constant K = 10. Measurement range 500µS/cm...200mS/cm, 0...80°C. Max. working pressure 5bar.

Conductivity probes characteristics at pag. WA-77

Standard conductivity calibration solutions

HD8747: Standard calibration solution 0.001mol/l equal to 147µS/cm @25°C - 200cc.

HD8714: Standard calibration solution 0.01mol/l equal to 1413µS/cm @25°C - 200cc.

HD8712: Standard calibration solution 0.1mol/l equal to 12880µS/cm @25°C - 200cc.

HD87111: Standard calibration solution 1mol/l equal to 111800µS/cm @25°C - 200cc.

Temperature probes complete with SICRAM module

TP472I: Wire wound Pt100 sensor, immersion probe. Stem Ø 3 mm, length 300 mm. Cable length 2 m.

TP472I.0: Thin film Pt100 sensor, immersion probe. Stem Ø 3 mm, length 230 mm. Cable length 2 m.

TP473PI: Wire wound Pt100 sensor, penetration probe. Stem Ø 4mm, length 150 mm. Cable length 2 m.

TP473PO: Thin film Pt100 sensor, penetration probe. Stem Ø 4mm, length 150 mm. Cable length 2 m.

TP474CI: Wire wound Pt100 sensor, contact probe. Stem Ø 4mm, length 230mm, contact surface Ø 5mm. Cable length 2 m.

TP474CO: Thin film Pt100 sensor, contact probe. Stem Ø 4mm, length 230mm, contact surface Ø 5mm. Cable length 2 m.

TP475A.0: Thin film Pt100 sensor, air probe. Stem Ø 4mm, length 230mm. Cable length 2 m.

TP472I.5: Thin film Pt100 sensor, penetration probe. Stem Ø 6mm, length 500 mm. Cable length 2 m.

TP472I.10: Thin film Pt100 sensor, penetration probe. Stem Ø 6mm, length 1000mm. Cable length 2 m.

TP49A.0: Thin film Pt100 sensor, immersion probe. Stem Ø 2,7mm, length 150mm. Cable length 2 m. Aluminium handle

TP49AC.0: Thin film Pt100 sensor, contact probe. Stem Ø 4mm, length 150mm. Cable length 2 m. Aluminium handle

TP49AP.0: Thin film Pt100 sensor, penetration probe. Stem Ø 2,7mm, length 150mm. Cable length 2 m. Aluminium handle

TP875.I: Wire wound Pt100 sensor, 150mm diameter globe-thermometer equipped with handle. Cable length 2 m.

TP876.I: Wire wound Pt100 sensor, 50mm diameter globe-thermometer equipped with handle. Cable length 2 m.

TP87.0: Thin film Pt100 sensor, immersion probe. Stem Ø 3 mm, length 70 mm. Cable length 2 m.

TP878.0: Thin film Pt100 sensor, contact probe for solar panels. Cable length 2 m.

TP878.1.0: Thin film Pt100 sensor, contact probe for solar panels. Cable length 5 m.

TP879.0: Thin film Pt100 sensor, penetration probe for compost. Stem Ø 8 mm, length 1000 mm. Cable length 2 m.

Temperature probes without SICRAM module

TP47.100.0: Thin film Pt100 sensor, immersion probe. Stem Ø 3mm, length 230mm. Connection cable 4 wires with connector, length 2 m.

TP47.1000.0: Thin film Pt1000 sensor, immersion probe. Probe's stem Ø 3mm, length 230mm. Connection cable 4 wires with connector, length 2 m.

TP47: Connector for Pt100 4-wire and Pt1000 2-wire probes without SICRAM module.

TP87.100.0: Thin film Pt100 sensor, immersion probe. Stem Ø 3mm, length 70mm. 4-wires connection cable with connector, length 1 m.

TP87.1000.0: Thin film Pt1000 sensor, immersion probe. Stem Ø 3mm, length 70mm. 2-wires connection cable with connector, length 1 m.

